

SEPTIC TANK 15,000 GALLON

NOTES:

CONCRETE: 5000 psi @28 days

REF.: to conform with 5000 gallon tank
and specified earth cover

OPENINGS: 6" coreouts

DIVIDER BAFFLE: outlet endwall of 2nd tank


Third Tank to be set 3" lower
to allow for full 5000 gallon capacity


CONTRACTOR TO SUPPLY & INSTALL:

4" PVC SDR 35 Vent Line

8" PVC SDR 35 Equalization Line

6" PVC SDR 35 Inlet/Outlet Baffles

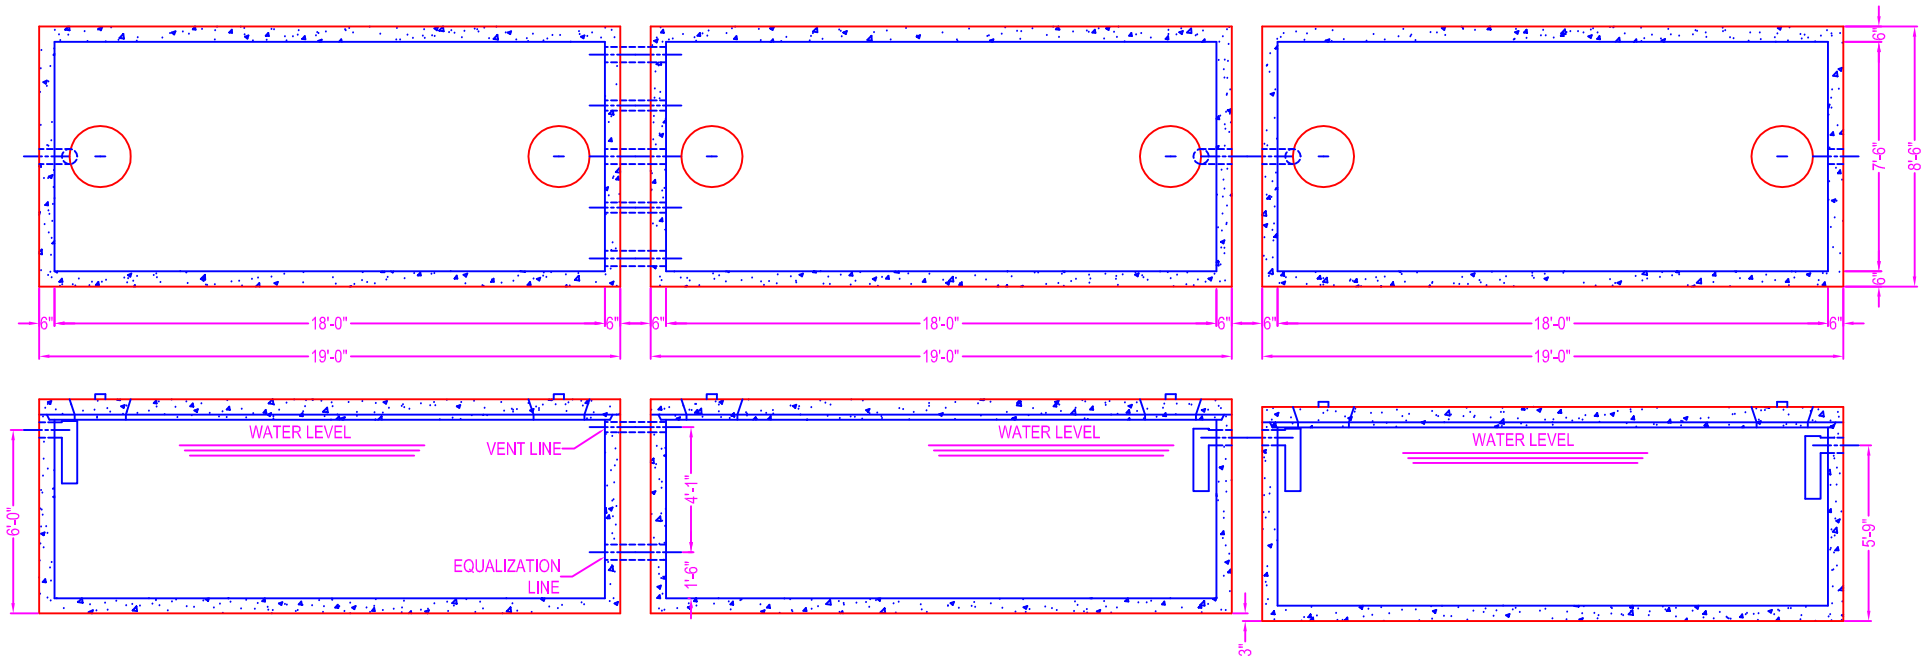

 <p>Zeiser Wilbert VAULT, INC. CONCRETE PRODUCTS</p>	<p>750 Howard Street Elmira, NY 14904 Fax: (607) 737-0291 Phone: (607) 733-0568 1-800-472-4335</p>	<p>Title: ST 15,000 SEP TANK</p>	<p>Drawn By: JPS</p>
		<p>Scale: Not To Scale</p>	<p>Drawing No.: 1020</p>
			<p>Date: 10-19-99</p>